

VC0325 USB 2.0 High-Speed PC Camera Processor with Built-in JPEG Encoder

General Description

VC0325 is a PC camera controller with USB 2.0 interface and USB 1.1 compatible. With high-speed USB2.0 transceiver VC0325 can easily achieve 30 fps with VGD image resolution and 60 fps with SIF image resolution. It also supports for off-the shelf CMOS sensor up to 1.3M and CCD sensor to VGA pixel resolution by built-in JPEG encode engine.

VC0325 comes with **64-pin LQFP package** at 10mm x 10mm foot print, which is valuable choice for high end PC camera and network camera.

Sensor Support	Off-the-shelf CMOS sensors up to 1.3M pixel resolution and CCD Sensor to VGA
JPEG Encoder	Built-in
Video Output Format	1.3M,VGA, SIF, QSIF
Still Image Output format	1.3M, VGA, SIF
USB Protocol	USB 2.0 HS and FS
Max Frames/sec.	30 @ VGA,60 @ SIF
OS	Windows, MAC, Linux, Vxworks, WinCE
64 bit OS	Windows
Special Effects	Relief, Negative.....
User-defined frame	Supported
USB Video Class	Supported
Digital Zoom	Supported
Automatic exposure	Supported
Auto Defect pixel detection and cancellation	Supported
Auto White Balance	Supported
Face tracking	Supported












VC0325 USB 2.0 High-Speed PC Camera Processor with Built-in JPEG Encoder

Chip Features


- ✚ Imaging Applications
 - ✧ Still image capture(one frame at a time)
 - ✧ Video streaming up to 30fps at VGA resolution and 15fps@1.3M
- ✚ Built-in 8-bit MCU
 - ✧ High performance MCU core with rich supporting peripherals
 - ✧ On-chip SRAM for high performance
- ✚ GPIOs for Typical Camera Control Support
 - ✧ Snapshot button
 - ✧ Privacy shutter switch
 - ✧ LED indicator
- ✚ Image Processing
 - ✧ 10-bit wide accuracy in color processing
 - ✧ Auto Exposure (AE)
 - ✧ Auto White Balance (AWB)
 - ✧ Auto Gain Control (AGC)
 - ✧ Auto defect pixel detection and cancellation
 - ✧ Auto motion detection
 - ✧ Auto flicker detection and cancellation
 - ✧ Auto lens shading compensation
 - ✧ Configurable image noise reduction
 - ✧ Configurable image sharpness enhancement
 - ✧ Configurable gamma and color correction
 - ✧ Configurable brightness, color saturation, and hue
 - ✧ Edge-adaptive CFA interpolation
 - ✧ Back light compensation
 - ✧ Support black and white sensor natively
 - ✧ Up to 16 windows for statistical collection, exposure and backlight correction
 - ✧ Embedded line buffers to capture, process and compress (MJPEG) 30fps VGA in YUV422 @ < 22:1 compression ratio over a USB 2.0 FS connection (< 62% bandwidth usage)
 - ✧ Embedded line buffers to capture, process and compress (MJPEG) 15fps 1.3M in YUV422 @ < 6:1 compression ratio over a USB 2.0 HS connection(< 41% bandwidth usage)
 - ✧ Histogram data (64 bins)
- ✚ Output Video Format
 - ✧ Bayer (raw 8 or 10 bits/pixel)

VC0325 USB 2.0 High-Speed PC Camera Processor with Built-in JPEG Encoder

- ✧ YUY2 (16 bits/pixel)
- ✧ JPEG/MJPEG
-  Support for off-shelf VGA/1.3M CMOS sensor and VGA CCD sensor
-  Support for USB 2.0 interface for data transfer
 - ✧ Support for USB Video Class
 - ✧ Support for various OS including 64-bit windows, windows, MAC, Linux.....
-  Support for various Special Effects via hardware
 - ✧ Monochrome
 - ✧ Sepia
 - ✧ Special color
 - ✧ Negative
 - ✧ Relief
 - ✧ Sketch
 - ✧
-  Support for User-defined frame
-  Support for Face tracking
-  64-pin LQFP Package
-  Compliance
 - ✧ USB Specification Rev.2.0 Compliance
 - ✧ Microsoft WHQL compliance
-  Power Management
 - ✧ 1.8V Core and 3.3V I/O
 - ✧ Multiple Power Modes
-  Operating Temperature
 - ✧ Extended -40 to +125

VC0325 USB 2.0 High-Speed PC Camera Processor with Built-in JPEG Encoder

VC0325 Block Diagram

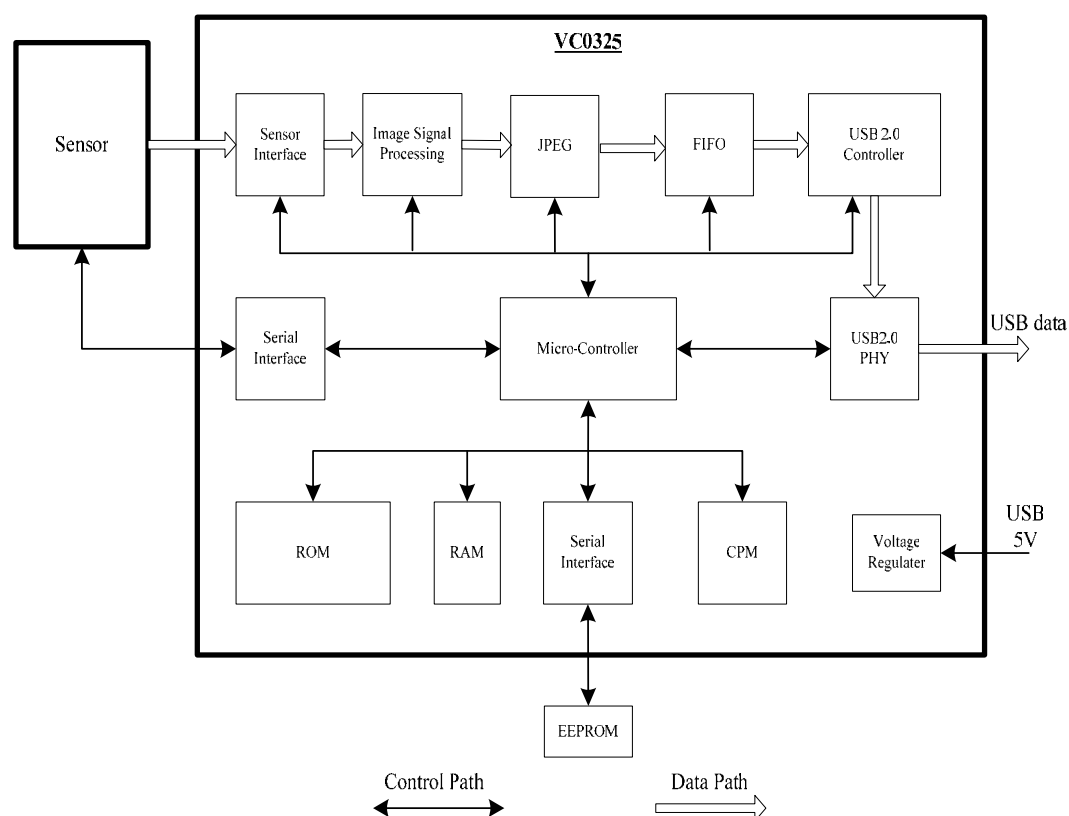

Contact Information

Vimicro Corporation 15/F, Shining
Tower No. 35 Xueyuan Road Haidian
District, Beijing P. R. China 100083
Tel: 86-10-68948888
Fax: 86-10-68944075
<http://www.vimicro.com>

Vimicro Corporation – USA 1758 N.
Shoreline Mountain View, CA 94043
Tel: 1-650-966-1882
Fax: 1-650-966-1885